



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/013385 A2

(51) International Patent Classification?: **H01L 43/10,**
43/08, G01R 33/09

(21) International Application Number:
PCT/IB2004/002543

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
TO2003A000604 5 August 2003 (05.08.2003) IT
TO2003A000605 5 August 2003 (05.08.2003) IT
TO2003A000727 23 September 2003 (23.09.2003) IT

(71) Applicant (for all designated States except US): C.R.F.
SOCIETÀ CONSORTILE PER AZIONI [IT/IT]; Strada
Torino, 50, I-10043 Orbassano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PULLINI, Daniele
[IT/IT]; c/o C.R.F. Società Consortile per Azioni, Strada

Torino 50, I-10043 Orbassano (Torino) (IT). MAR-
TORANA, Brunetto [IT/IT]; c/o C.R.F. Società Consor-
tile per Azioni, Strada Torino 50, I-10043 Orbassano (IT).
PERLO, Piero [IT/IT]; Via Chichignolo, 19, I-12048
Sommariva Bosco (IT).


(74) Agents: NOTARO, Giancarlo et al.; Buzzi, Notaro & An-
tonicelli d'Oulx S.r.l., Via Maria Vittoria 18, I-10123 Torino
(IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHOD FOR MANUFACTURING MAGNETIC FIELD DETECTION DEVICES AND DEVICES THEREFROM

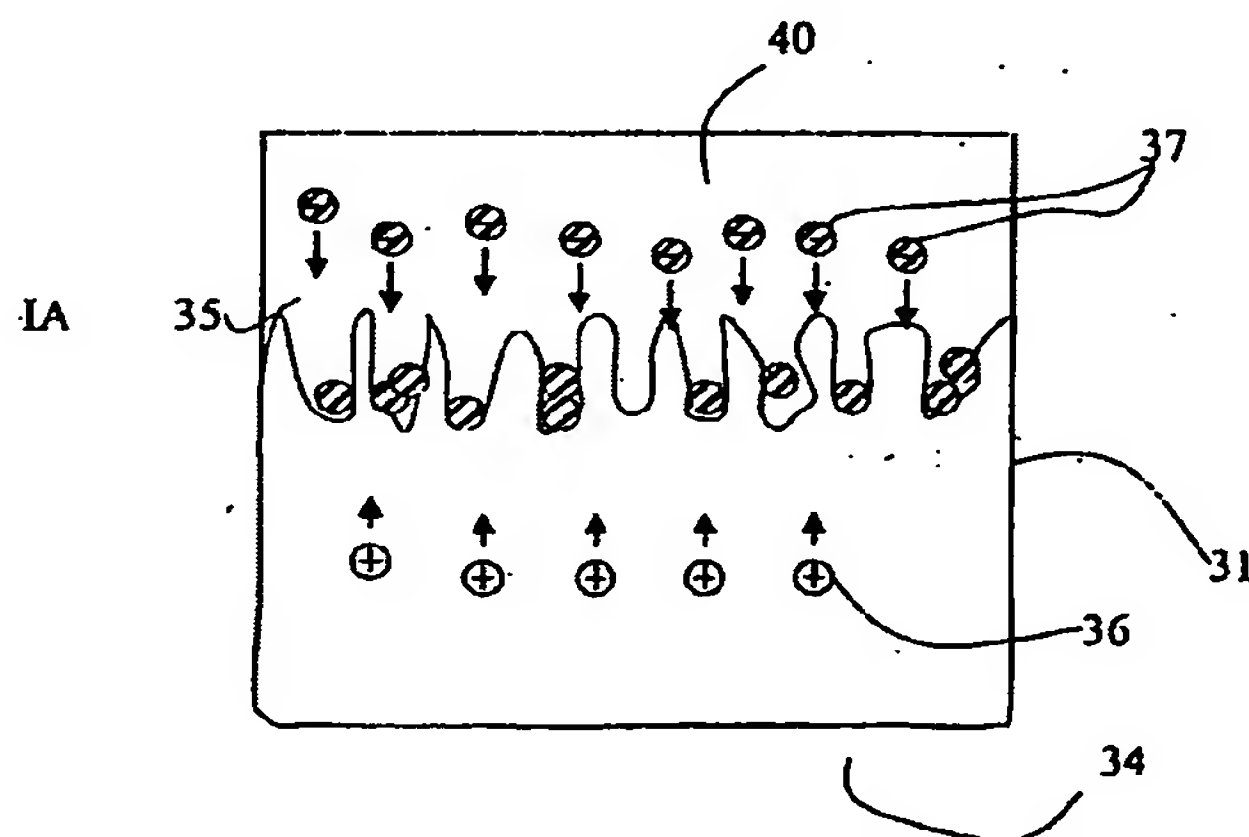

(57) Abstract: A method for manufacturing magnetic field detection devices is described, said method comprising the operations of manufacturing a magneto-resistive element (10; 20) comprising regions with metallic conduction (13; 23) and regions with semi-conductive conduction (11; 31). Said method comprises the following operations: - forming metallic nano-particles (37) to obtain said regions with metallic conduction (13; 23); - providing a semiconductor substrate (31); - applying said metallic nano-particles (37) to said semiconductor substrate (31) to obtain a disordered mesoscopic structure. A magnetic device is also described, comprising a spin valve, said spin valve (110) comprising a plurality of layers (111, 112, 113, 114, 115, 116, 117) arranged in a stack which in turn comprises at least one free magnetic layer (111) able to be associated to a temporary magnetisation (MT), a spacer layer (133) and a permanent magnetic layer (112) associated to a permanent magnetisation (MP). The spacer element (133) is obtained by means of a mesoscopic structure of nanoparticles in a metallic matrix produced in accordance with the method for manufacturing magnetoresistive elements of the invention.